

NOTES:

- 1) Ground, Supply Voltage, Lock Alarm, and Voltage are solderable terminals.
- 2) RF Output freq RF Output connector
 - f > 24GHz 2.92mm female
 - f < 24GHz SMA female
- 3) Dimensions are subject to change in the interest of improved product performance



DATE	REVISION	CHANGES	APPROVED
7/28/03	2	MOVED REFERENCE TUNER HOLE	BB
9/11/03	3	CHANGED FREQ RANGE	BB
4/28/04	4	CHANGED FREQ RANGE	BB

D

C

B

A

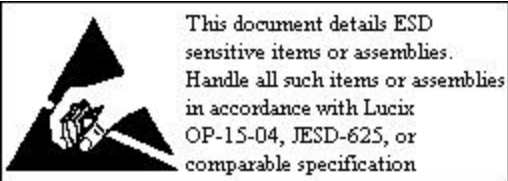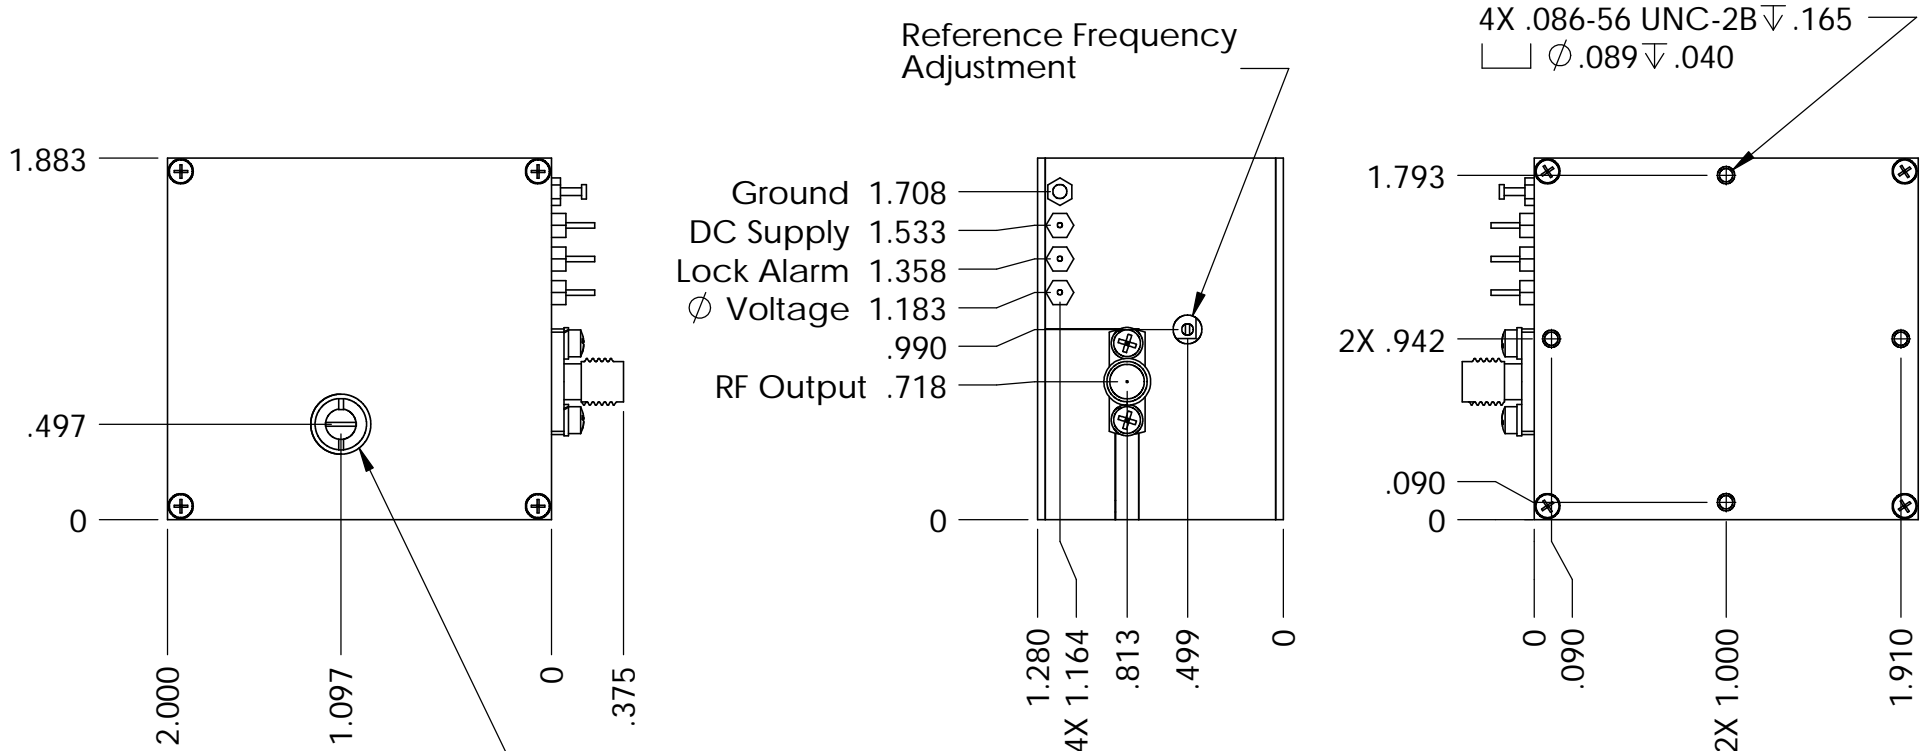

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
FRACTIONS	DECIMALS	APPROVALS	DATE
	±.010	DRAWN B.Bufford	6/26/03
ANGLES	±.01	CHECKED	
MATERIAL	n/a	RESP ENG B.Bufford	6/26/03
FINISH	n/a	MFG ENG	
DO NOT SCALE DRAWING		QUAL ENG	

Lucix Corporation
 ALL INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE LUCIX CORPORATION.

**Outline,
 1-16, 24-32GHz IRDRO**

SIZE A DWG. NO. **4CD031-1** REV. **4**

SCALE 1:1 CAD FILE: OL_8_14_IRDRO_Uni_m... SHEET 1 OF 1