
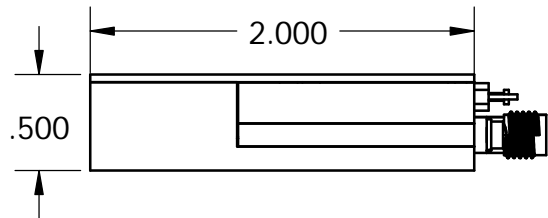
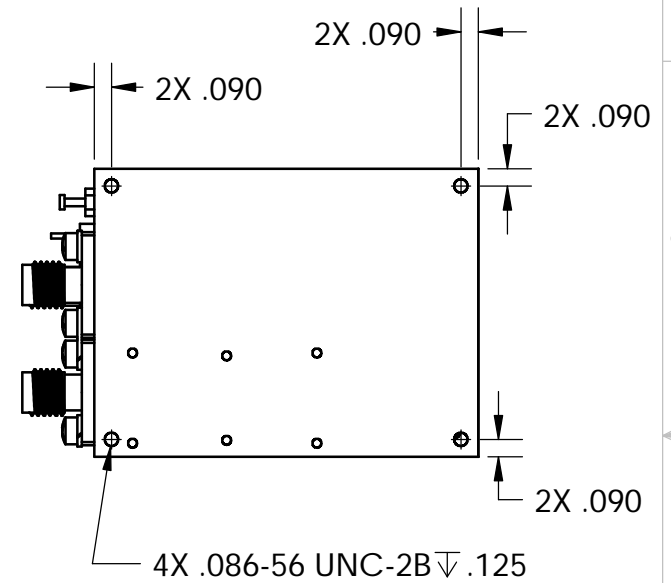
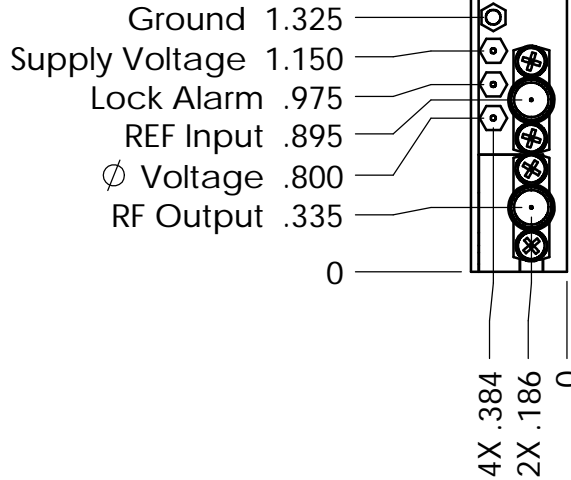


NOTES:

- 1) Ground, Supply Voltage, Lock Alarm, and ϕ Voltage are solderable terminals.
- 2) REF Monitor is field replaceable SMA female.
- 3) RF Output freq RF Output connector
 $f > 24\text{GHz}$ 2.92mm female
 $f < 24\text{GHz}$ SMA female
- 4) Dimensions are subject to change in the interest of improved product performance

DATE	REVISION	CHANGES	APPROVED
9/11/03	4	CHANGED FREQUENCY RANGE	BB

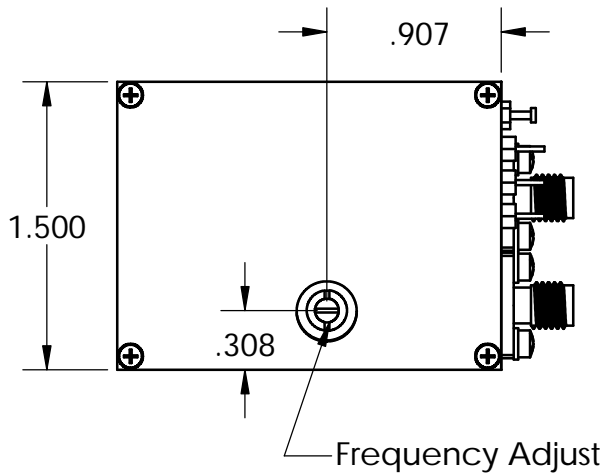

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±.010 ±.01	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		Lucix Corporation ALL INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE LUCIX CORPORATION.		
	APPROVALS	DATE			
	DRAWN B.Bufford	2/27/02	Outline, 16-24, 32-44GHz ERDRO		
	CHECKED				
MATERIAL n/a	RESP ENG B.Bufford	2/27/02			
FINISH n/a	MFG ENG		SIZE A	DWG. NO. OUT24	REV. 4
DO NOT SCALE DRAWING	QUAL ENG		SCALE 1:1	CAD FILE: OL_EC_ED	SHEET 1 OF 1